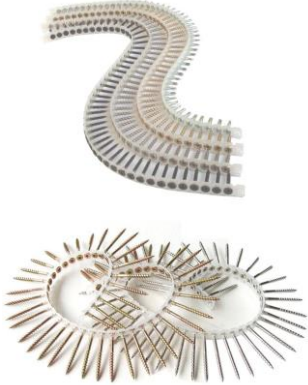



BELT TYPE COLLATED SCREW	SCREW	SPECIFICATION
	Screw Type	Drywall Screws, Chipboard Screws, Tapping Screws and Drilling Screws
	Screw Head	Flat Head, Bugle Head, Pan Head
	Head Outside Diameter	6.6 – 9.5 mm
	Head Thickness	0.8 – 2.5 mm
	Screw Thread	3.0 – 5.0 mm
	Screw Length	19 – 75 mm
	Wing Width	53 mm and blow
	Packing	50 pieces per strip, 20 strips per box

Compatible with any range of power tools, such as Makita, Senco, Hitachi, Grabber super drive, Pam, Fein, Prebena, Hilti ...etc.

PREMIUM QUALITY SCREW	SCREW TYPE	SPECIFICATION
	<ul style="list-style-type: none"> ● STANDARD SCREW ● CUSTOMIZED SCREW ● ROOFING SCREW 	<ul style="list-style-type: none"> ● MATERIAL: SUS304, 316, 410, YUS550, CARBON STEEL, BRASS... ● STANDARD: ANSI, JIS, DIN, ISO, OR CUSTOMIZED ● SIZE: M1.2 ~ M20 ● LENGTH: 2~30mm